

SELECT ADVANTAGES



PAIR-MATCHED™ HINGE LEAVES

Manufactured together, machined together and anodized together to fit your doors better and last longer.

**An exclusive
SELECT benefit.**



LIFETIME LUBRICATION

Eliminates the need for periodic maintenance. Quiet performance. Fights gear cap wear.

**An exclusive
SELECT benefit.**



ANODIZED AFTER MACHINING

Delivers superior wear, durability and life. Inhibits corrosion. Few hinge makers follow SELECT's lead in using this superior manufacturing process.



PATENTED 3-HR. FIRE RATING

Available without pins or studs. No extra parts to buy or install. Design innovation approved for positive and negative pressure. **An exclusive
SELECT benefit.**



TEMPLATED HOLE PATTERN

Hole pattern is identical on both SD and HD models, so SELECT hinges line up precisely for easier and faster installation.

**An exclusive
SELECT benefit.**



COATED FASTENERS

Provide additional corrosion protection with either self-drilling, thread-forming (SDTF) or thread-forming (TF) screws. **An exclusive
SELECT benefit.**



CUSTOM COLORS

Match any paint color on the gear cap or the entire hinge and fasteners, including our always-in-stock Bone White gear caps. Anodized colors also available.



60+ YEAR PRODUCT LIFE CYCLE

Long life makes them a "green" choice and qualifies toward LEED points for recycled content, low VOC and regional materials.



**Keep your door.
Keep your frame.
Change the hinge.**

**SAVE TIME AND MONEY BY FIXING
YOUR DOOR PROBLEMS FOR GOOD**



SELECT HINGES™

**The
GREEN Hinge™**
Meets **LEED** requirements



**SELECT
HINGES®**

SELECT Products Limited

800-423-1174

select-hinges.com



Printed on FSC Certified recycled paper.

© 2016 SELECT Products Limited
Printed in U.S.A. #FL-101716

**Visit
NFM&T
Booth
#624**



SELECT hinges' 60-year life cycle means you can fix it and forget it.


Independent lab tests on an FRP door prove SELECT hinges withstand 25,000,000 cycles — 10 times beyond Grade 1 cycle count. That equals more than 60 years of high-traffic use, more traffic than most doors see in a lifetime.

SELECT hinges' durability means we can offer the industry's only Continuous Warranty™. It covers any failure of our aluminum geared continuous hinges — with no expiration date — as long as they were properly installed.




CONCEALED HINGES

Edge mount. No mortise required. For new construction or renovation/retrofit.

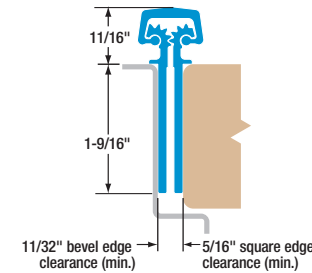


SL11 SD/HD/LL
Flush mounted (no door inset).

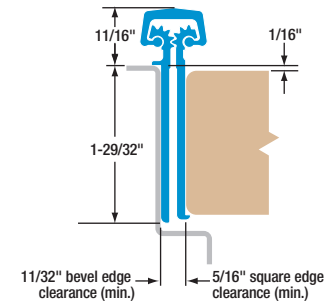


SL24 SD/HD/LL
1/16" door inset. Door edge protector. Frame leaf covers butt hinge preps.

FULL SURFACE HINGES

Mounts on face of door and frame. For renovation/retrofit or new construction.

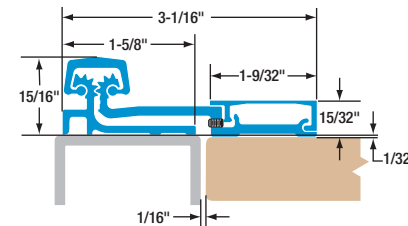


SL21 SD/HD
1/32" door inset. Swing-clear action. Tamper-resistant, removable door leaf cover.

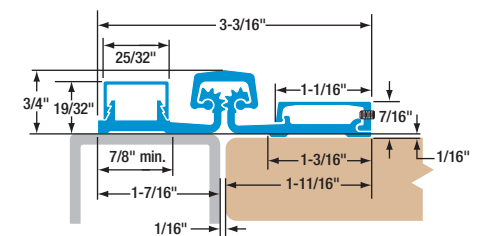

SL57 SD/HD
1/16" door inset. Frame leaf fits narrow (7/8") frame face. Tamper-resistant door leaf cover.

TOILET PARTITIONS


For high-frequency stall doors up to 80 lb., 36" wide.

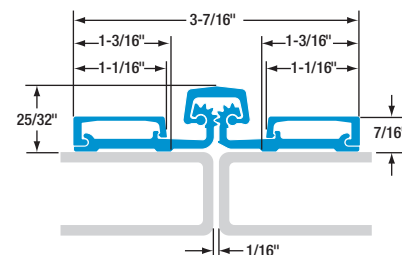

SL60 57" length. Hinge opens to 180°. **SL62** 57" length. Self-closing hinge opens to 120°.

HALF SURFACE HINGE

Mounts on door face and frame rabbet. For renovation/retrofit or new construction.

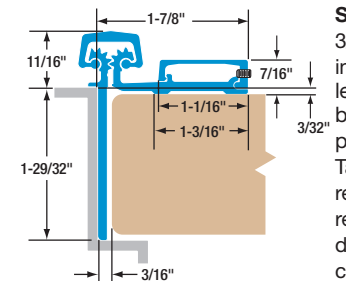

SL54 HD 3/32" door inset. Frame leaf covers butt hinge preps. Tamper-resistant, removable door leaf cover.